


12.215 Modern Navigation

**Thomas Herring (tah@mit.edu),
MW 10:30-12:00 Room 54-322
<http://geoweb.mit.edu/~tah/12.215>**

Today's Class Latitude and Longitude

- Finish discussion of reference systems (end of Lec 1)
- Simple spherical definitions
- Geodetic definition: For an ellipsoid
- Astronomical definition: Based on direction of gravity
- Relationships between the types
- Coordinate systems to which systems are referred
- Temporal variations in systems

Simplest Global Reference Frame

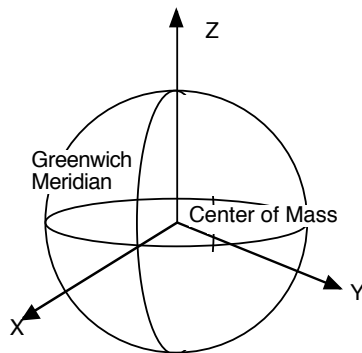

- Geometric: Origin at the center of mass of the Earth; Orientation defined by a Z-axis near the rotation axis; one “Meridian” (plane containing the Z-axis) defined by a convenient location such as Greenwich, England.
- Coordinate system would be Cartesian XYZ.

09/21/2009

12.215 Modern Navigation L02

3

Simple System

- The use of this type of simple system is actually a recent development and is the most common system used in GPS.
- Until the advent of modern “space-based geodetic systems” (mid-1950s), coordinate systems were much more complicated and based on the gravity field of the Earth.
- Why?

09/21/2009

12.215 Modern Navigation L02

4

Potential based coordinate systems

- The basic reason is “realization”: Until distance measurements to earth-orbiting satellites and galactic-based distance measurements, it was not possible to actually implement the simple type measurement system.
- Conventional (and still today) systems rely on the direction of the gravity vector
- We think in two different systems: A horizontal one (how far away is something) and a vertical one (height differences between points).

09/21/2009

12.215 Modern Navigation L02

5

Conventional Systems

- Conventional coordinate systems are a mix of geometric systems (geodetic latitude and longitude) and potential based systems (Orthometric heights).
- The origin of conventional systems are also poorly defined because determining the position of the center of mass of the Earth was difficult before the first Earth-orbiting artificial satellite. (The moon was possible before but it is far enough away that sensitivity center of mass of the Earth was too small).

09/21/2009

12.215 Modern Navigation L02

6

Simple Geocentric Latitude and Longitude


- The easiest form of latitude and longitude to understand is the spherical system:
- Latitude: Angle between the equatorial plane and the point. Symbol ϕ_c (in this class)
- Latitude is also the angle between the normal to the sphere and the equatorial plane
- Related term: co-latitude = 90° -latitude. Symbol θ_c (in this class). Angle from the Z-axis
- Longitude: Angle between the Greenwich meridian and meridian of the location. Symbol λ_c

09/21/2009

12.215 Modern Navigation L02

7

Geocentric quantities

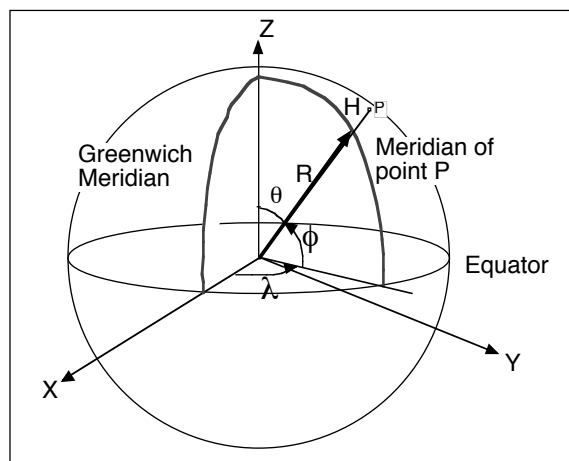

- Geocentric Latitude and Longitude
- Note: Vector to P is also normal to the sphere.

09/21/2009

12.215 Modern Navigation L02

8

Geocentric relationship to XYZ

- One of the advantages of geocentric angles is that the relationship to XYZ is easy. R is taken to be radius of the sphere and H the height above this radius

$$\phi_c = \tan^{-1}(Z/\sqrt{X^2 + Y^2})$$

$$\lambda_c = \tan^{-1}(Y/X)$$

$$R + H_c = \sqrt{X^2 + Y^2 + Z^2}$$

$$X = (R + H_c) \cos \phi_c \cos \lambda_c$$

$$Y = (R + H_c) \cos \phi_c \sin \lambda_c$$

$$Z = (R + H_c) \sin \phi_c$$

09/21/2009

12.215 Modern Navigation L02

9

Problem with Geocentric

- Geocentric measures are easy to work with but they have several serious problems
- The shape of the Earth is close to an bi-axial ellipsoid (i.e., an ellipse rotated around the Z-axis)
- The flattening of the ellipsoid is $\sim 1/300$ (1/298.257222101 is the defined value for the GPS ellipsoid WGS-84).
- Flattening is $(a-b)/a$ where a is the semi-major axis and b is the semi-minor axis.
- Since $a=6378.137$ km (WGS-84), $a-b=21.384$ km

09/21/2009

12.215 Modern Navigation L02

10

Geocentric quantities

- If the radius of the Earth is taken as b (the smallest radius), then H_c for a site at sea-level on the equator would be 21km (compare with Mt. Everest 28,000feet~8.5km).
- Geocentric quantities are never used in any large scale maps and geocentric heights are never used.
- We discuss heights in more in next class and when we do spherical trigonometry we will use geocentric quantities.

09/21/2009

12.215 Modern Navigation L02

11

Ellipsoidal quantities


- The most common latitude type seen is geodetic latitude which is defined as the angle between the normal to the ellipsoid and the equatorial plane. We denote with subscript g .
- Because the Earth is very close to a biaxial ellipsoid, geodetic longitude is the same as geocentric longitude (the deviation from circular in the equator is only a few hundred meters: Computed from the gravity field of the Earth).

09/21/2009

12.215 Modern Navigation L02

12

Geodetic Latitude

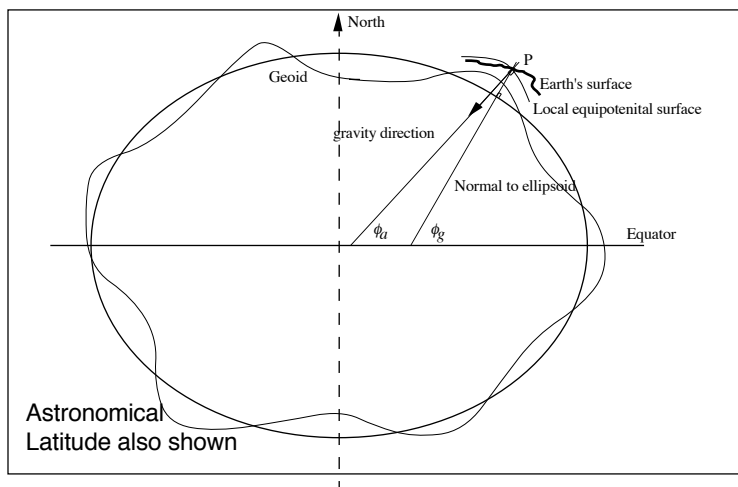

09/21/2009

12.215 Modern Navigation L02

13

Relationship between ϕ_g and XYZ

- This conversion is more complex than for the spherical case.

$$X = (N + h_g) \cos(\phi_g) \cos(\lambda_g)$$

$$Y = (N + h_g) \cos(\phi_g) \sin(\lambda_g)$$

$$Z = [(1 - e^2)N + h_g] \sin(\phi_g)$$

where $e^2 = 2f - f^2$ and N (North - South radius of curvature) is

$$N^2 = a^2 / [1 - e^2 \sin^2(\phi_g)]$$

09/21/2009

12.215 Modern Navigation L02

14

Inverse relationship

- The inverse relationship between XYZ and geodetic latitude is more complex (mainly because to compute the radius of curvature, you need to know the latitude).
- A common scheme is iterative:

$$\mapsto N' = a / \sqrt{1 - e^2 \sin^2 \phi'}$$

$$r' = \sqrt{X^2 + Y^2} [1 - e^2 N' / (N' + h')]$$

$$\phi' = \tan^{-1}(Z / r')$$

$$h' = \sqrt{X^2 + Y^2} / \cos \phi' - N' \text{ or } h' = Z / \sin \phi' - (1 - e^2) N'$$

iterate to \mapsto until h' change is small

09/21/2009

12.215 Modern Navigation L02

15

Coordinate Conversion: Cartesian (ECEF X, Y, Z) and Geodetic (Latitude, Longitude, and Height)

Direct Solution for Latitude, Longitude, and Height from X, Y, Z

This conversion is not exact and provides centimeter accuracy for heights < 1,000 km
(See Bowring, B. 1976. Transformation from spatial to geographical coordinates.
Survey Review, XXIII: pg. 323-327)

Closed form
expression for
small heights

$$\phi = \text{atan}\left(\frac{Z + e'^2 b \sin^2 \theta}{p - e'^2 a \cos^2 \theta}\right)$$

$$\lambda = \text{atan2}(Y, X)$$

$$h = \frac{p}{\cos(\phi)} - N(\phi)$$

where:

ϕ, λ, h = geodetic latitude, longitude, and height above ellipsoid

X, Y, Z = Earth Centered Earth Fixed Cartesian coordinates

and:

$$p = \sqrt{X^2 + Y^2} \quad \theta = \text{atan}\left(\frac{Za}{pb}\right) \quad e'^2 = \frac{a^2 - b^2}{b^2}$$

$N(\phi) = a / \sqrt{1 - e^2 \sin^2 \phi}$ = radius of curvature in prime vertical

a = semi-major earth axis (ellipsoid equatorial radius)

b = semi-minor earth axis (ellipsoid polar radius)

$$f = \frac{a - b}{a} = \text{flattening}$$

$$e^2 = 2f - f^2 = \text{eccentricity squared}$$

From <http://www.colorado.edu/geography/gcraft/notes/datum/gif/xyzllh.gif>

09/21/2009

12.215 Modern Navigation L02

16

Other items

- A discussion of geodetic datum and coordinate systems can be found at:
<http://www.colorado.edu/geography/gcraft/notes/datum/datum.html>
- Geodetic longitude can be computed in that same way as for geocentric longitude
- Any book on geodesy will discuss these quantities in more detail (also web searching on geodetic latitude will return many hits).
- The difference between astronomical and geodetic latitude and longitude is called “deflection of the vertical”

09/21/2009

12.215 Modern Navigation L02

17

Astronomical latitude and longitude

- These have similar definitions to geodetic latitude and longitude except that the vector used is the direction of gravity and not the normal to the ellipsoid (see earlier figure).
- There is not direct relationship between XYZ and astronomical latitude and longitude because of the complex shape of the Earth’s equipotential surface.
- In theory, multiple places could have the same astronomical latitude and longitude.
- As with the other measures, the values of depend on the directions of the XYZ coordinate axes.

09/21/2009

12.215 Modern Navigation L02

18

Coordinate axes directions


- The origin of the XYZ system these days is near the center of mass of the Earth deduced from the gravity field determined from the orbits of geodetic satellites (especially the LAGEOS I and II satellites).
- The direction of Z-axis by convention is near the mean location of the rotation axis between 1900-1905. At the time, it was approximately aligned with the maximum moments of inertia of the Earth. (review:

http://dept.physics.upenn.edu/courses/gladney/mathphys/java/sect4/subsubsection4_1_4_2.html

Motion of rotation axis

- The rotation axis has moved about 10 m on average since 1900 (thought to be due to post-glacial rebound).
- It also moves in circle with a 10 m diameter with two strong periods: Annual due to atmospheric mass movements and 433-days which is a natural resonance frequency of an elastic rotating ellipsoid with a fluid core like the Earth.

Motion of rotation axis 1993-2001

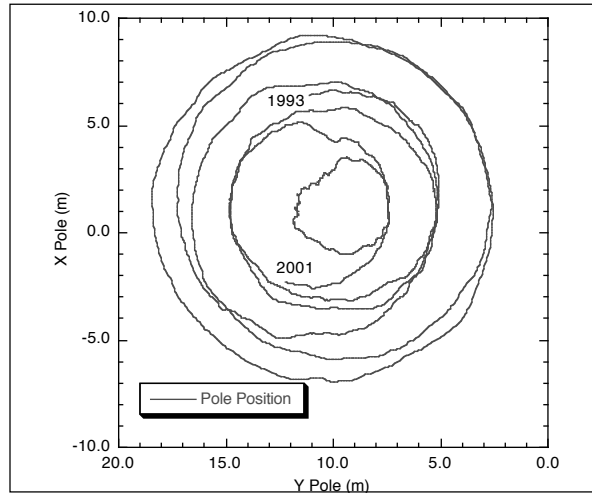

Note that the origin of this plot (0,0) is at the middle right hand edge

09/21/2009

12.215 Modern Navigation L02

21

Rotation rate of the Earth

- To determine longitude we need to know the time difference between an event (such as a star crossing the meridian of a location) and the time that event occurs in Greenwich.
- One of the things that observatories such as Greenwich do, is measurements of celestial events and note the times they occur.
- With models of the changes in the rotation of the Earth in space, these measurements can be used to prediction when events will occur in the future.

09/21/2009

12.215 Modern Navigation L02

22

Rotation rate of the Earth

- We examine these tabulations (called almanacs or ephemerides) later in the course.
- One process that makes these events non-predictable is changes in the rotation rate of the Earth.
- Measurements of these changes are compiled and published by the International Earth Rotation Service (IERS: <http://www.iers.org>)
- We will examine these variations when we look at astronomical positioning.

09/21/2009

12.215 Modern Navigation L02

23

Conventional definitions of coordinate systems

- Today we can use center of mass systems but in the past (prior to 1950) this was very difficult and so the origin and orientation of the axes was somewhat arbitrarily chosen.
- Different countries and at different times, the ellipsoidal parameters (a and b dimensions) were different
- The origin and orientation were set by adopting one location where the geodetic and astronomical latitude and longitude were set to be the same.
- For the US, this was Meades Ranch in mid-continent.
- The result of these arbitrary choices was that across country borders, geodetic coordinates could differ by several hundred meters. (Problematic when borders were defined by coordinates)

09/21/2009

12.215 Modern Navigation L02

24

Summary

- The important things from this lecture are:
 - Definitions of different types of latitude and longitude
 - Mathematical relationships between these can XYZ coordinates
 - Definitions of Z axis of the Earth coordinates
 - Possible major differences in coordinates between countries and at different times (e.g., NAD-27 and NAD-83)
- Next lecture we will look at height systems.